




GAM GO-LITE™

THE CUE LIGHT SOLUTION

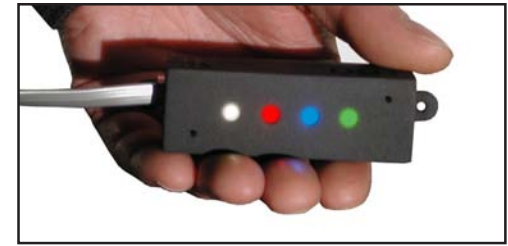


The GAM GO-LITE™ goes wherever you need it, the Green Room, in the flies, on the apron of your stage, on scenery, in the orchestra pit. Four colors; white, red, blue, and green, offer you a variety of different cuing combinations for multiple functions and/or performers. Use the GO-LITE™ as a guide or to illuminate dark areas.

- Easily installed anywhere
 - Screwed in or nailed
 - Taped
 - Velcro
 - Electrical junction box
- Economical
- Highly Visible
- Dependable
- Brilliantly Effective
- Expandable

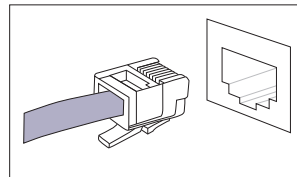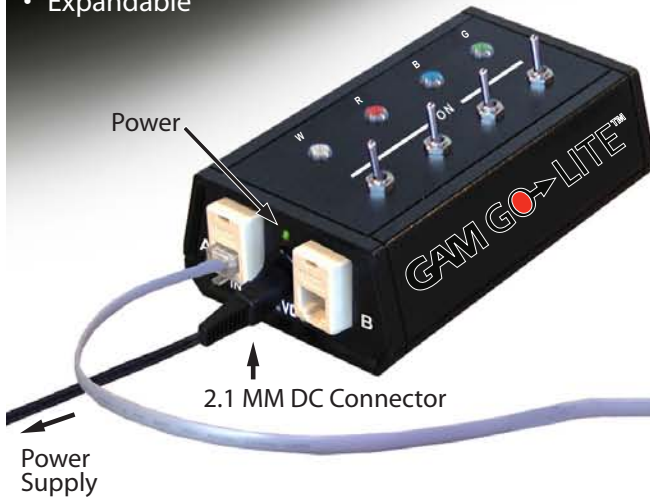

RJ-11 6P6C
Cable Connector

RJ-25 Socket

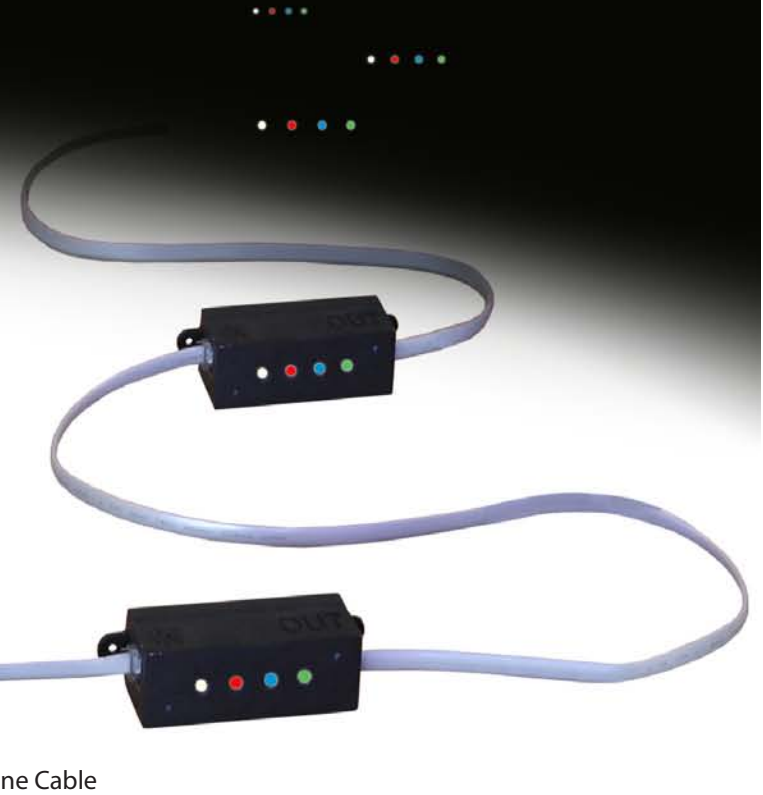

6-Wire Telephone Cable

Each GAM GO-LITE™ is supplied with a RJ-25 6-pin, 6-wire phone connector for IN and OUT connection. Use standard 6-wire phone cable to link up to 30 or more in series. Control the four LED cue lights; white, red, blue & green with the GAM 4-way Controller and power supply. Place the control box anywhere convenient for the stage manager. GO-LITE™ can also be controlled from a DMX GO-LITE™ Power Supply to operate from your show controller or light board. Rack mount controls are also available. The GAM GO-LITE™ will make it happen for you on time, on cue. GO-LITE™, the cue light solution.

GO-LITE™ Dimensions:

Weight1 oz (28 grams)
 Length2.68 in (68 mm)
 Depth1.125 in (28.57 mm)
 Width1 in (25.4 mm)

GO-LITE™ Manual Controller Dimensions:


Weight5 oz (141.74 grams)
 Length5.3 in (134.62 mm)
 Depth1.5 in (38.1 mm)
 Width3.35 in (85 mm)




4975 West Pico Blvd. TEL: [323] 935.4975
 Los Angeles, CA 90019 FAX: [323] 935.2002
www.gamonline.com
 ©GAMPRODUCTS, INC. 2010
 GO-LITE™ Patent Pending



Edison • Single String • 4 Circuits

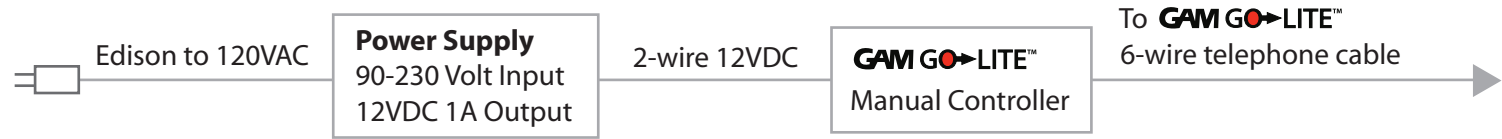

Battery Supply • Single String • 4 Circuits

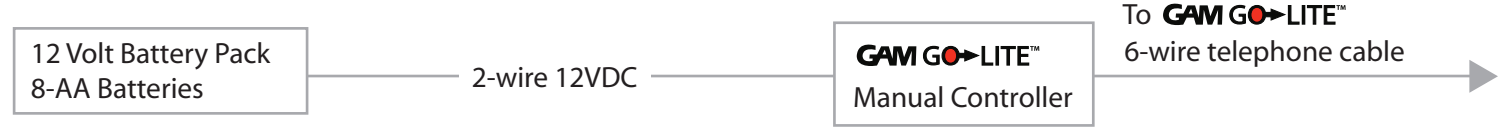

Rack Mount • Single String • 4 Circuits



Rack Mount DMX Control • Single String • DMX 4 Channels



Rack Mount DMX Control • 12-String • DMX 48 Channels



Electrical Junction Box Assembly

